

4X39WS+FC ROUND STRAND STEEL

Features


Designed for crane, hoist and piling application

Fiber core

4 strand with 39 wires per strand configuration

Swivel | Tolerance | Lubricate | Preformed

Diameter (mm)	Weight (kg/m)	1960 (N/mm ²)	
		kN	Ton (metric)
20	1.79	278	28,4
22	1.82	335	34,2
24	2.2	385	39,3
26	2.6	467	47,6
28	2.99	543	55,4
30	3.44	624	63,6
32	3.88	709	72,3
33.5	4.16	789	80,5
34	4.45	801	81,7
36	4.85	898	91,6
38	5.5	1014	103,4

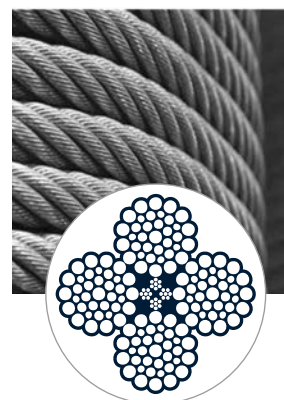

K4X36WS STEEL WIRE ROPE

Features

Designed for crane, hoist and piling application

4 strand with 36 compacted wires per strand configuration

Swivel | Tolerance | Lubricate | Preformed | Compacted

Diameter (mm)	Minimum breaking load (180 kg/mm ² - 1770 N/mm ²) (Ton)	Minimum breaking load (200 kg/mm ² - 1960 N/mm ²) (Ton)	Approx weight (Kg/m)
16	20,6	22,5	1,2
18	26,1	28,5	1,52
19	29,1	31,7	1,69
20	32,2	35,2	1,88
22	39	42,5	2,27
24	46,4	50,6	2,7
26	53,8	58,4	3,11
28	63,2	68,9	3,68
30	72,5	79,1	4,22
32	82,5	90	4,81
34	93,1	101,6	5,43

