


# 19x7 ROTATION RESISTANT

## Features

Designed to minimize rotation of ropes when hanging loads

Cross lay construction

Strands laid in opposite directions

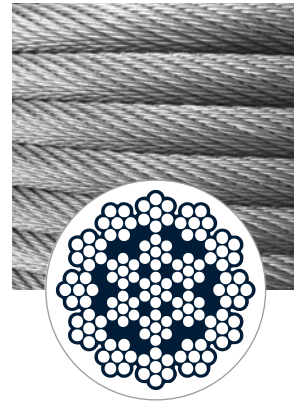

Swivel | Tolerance | Lubricate | Preformed

Diameter (mm)	Weight (kg/m)	1960 (N/mm <sup>2</sup> )		2160 (N/mm <sup>2</sup> )	
		kN	Ton (metric)	kN	Ton (metric)
8	0.2560	41,1	4,19	45,3	4,62
9	0.3240	52,1	5,31	57,4	5,85
10	0.4000	64,3	6,56	70,8	7,22
11	0.4840	77,8	7,94	85,7	8,74
12	0.5760	93	9,49	102	10,40
13	0.6760	109	11,12	120	12,24
14	0.7840	126	12,85	139	14,18
15	0.9000	145	14,79	159	16,22
16	1.0240	165	16,83	181	18,46
17	1.1560	186	18,97	205	20,91
18	1.2960	208	21,22	230	23,46
19	1.4440	232	23,66	256	26,11
20	1.6000	257	26,21	283	28,87
21	1.7640	284	28,97	312	31,82
22	1.9360	311	31,72	343	34,99
23	2.1160	340	34,68	375	38,25
24	2.3040	370	37,74	408	41,62
25	2.5000	402	41,00	443	45,19
26	2.7040	435	44,37	479	48,86
27	2.9160	469	47,84	516	52,63
28	3.1360	504	51,41	555	56,61
29	3.3640	541	55,18	596	60,79
30	3.6000	579	59,06	638	65,08
36	5.1840	833	84,97	918	93,64