



AMBER  **WINCHLINE**
Plus



Fiber

UV stabilized high tenacity polyolefin hybrid yarn

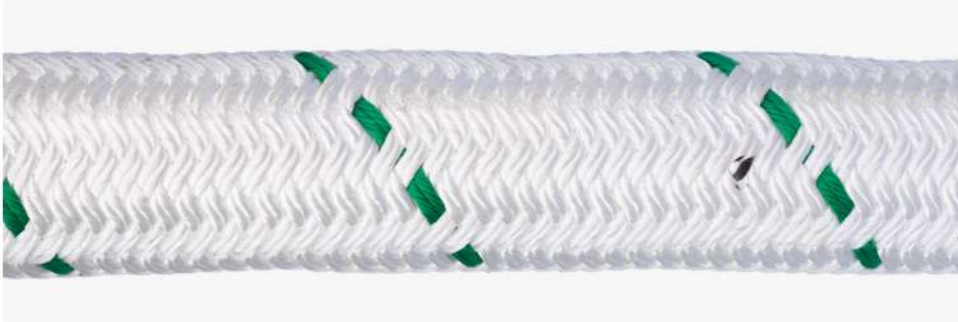

Construction

12-strand braided core + outer cover layer



Specific gravity

0.93 (floating)



Elongation

Approx. 15%



Melting point

165°C



UV resistance

Good



Abrasion resistance

Excellent



Application

Mooring, winch line, anchor line and other heavy duty applications.

Features

Low elongation increases safety by minimizing risks due to snapback action. Doesn't lose strength when wet.

Diameter (mm)	Circ (inch)	Weight/220m (kg)	Breaking strength (t)	LDBF MEG4 (t)
48	6	291.5	48	43
50	6-1/4	316.4	52	47
52	6-1/2	351	59	53
56	7	401.5	65	59
60	7-1/2	440	75	68
64	8	490.6	86	77
66	8-1/16	506.9	91	82
68	8-1/2	550	95	86
72	9	617.1	106	95
80	10	792	130	117

All products are produced in accordance with OCIMF and MEG4 guidelines and IACS approved